

# KERS INDOOR COOLBOOST MODULE HEAT PUMP

Hot Water - Heat Recovery - FreeCooling  
MITIGATES OVERHEATING IN DWELLINGS



PATENT  
PENDING  
2301647.0

The Coolboost Module integrates with the **Weatherby Indoor Heat Pump System** to provide a combined renewable hot water and free cooling solution.



**MVHR + COOLBOOST**


**PART O +TM59  
BUILDING REGS COMPLIANT**




# HOW IT WORKS

Heat pump technology is used to provide LOW COST renewable hot water with the resultant by-product cool air. Recycled to cool the apartment interior.

TOP

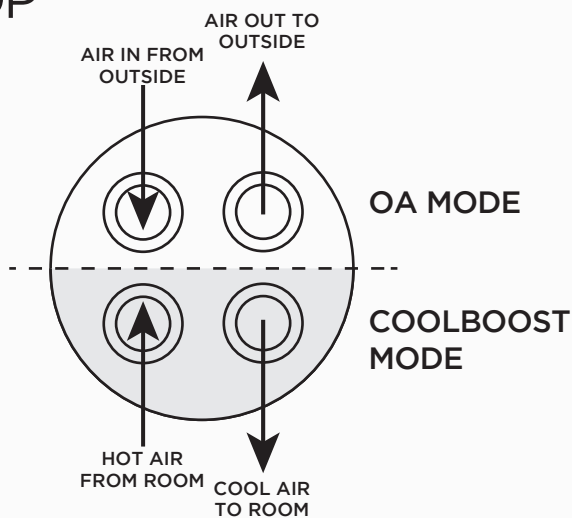

FRONT

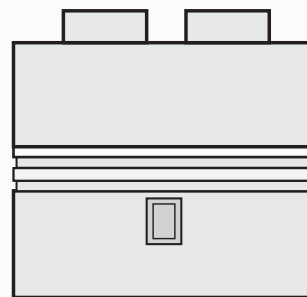

**COOLBOOST MODULE**

On the above example air is taken from within the room, absorbing the energy and the resultant cool air is diverted into the room to supply free cooling.

Specialist software and internal dampers allows the following control strategy to work.

---

### **OA FUNCTION (Standard heat pump mode)**

The heat pump takes the air from the outside into the heat pump where the energy is absorbed and recycled through the heat pump hot water process.

---

### **COOLBOOST FUNCTION (Cooling required)**

The controller software activates internal dampers to switch the direction of the air from where it is being taken in.

## FEATURES

- > Provides low carbon hot water and free cooling
- > Mitigates overheating in dwellings
- > Cooling capacity 1.5kw
- > No external condenser required
- > Works alongside MVHR systems
- > Auto cooling mode
- > Summer by pass
- > Acheives 70c without immersion
- > PEEK LOPPING
- > TRIM COOLING
- > FREE COOLING
- > 1.2kw coolth
- > Summer bypass
- > Part o compliant
- > 25C+
- > MVHR compatible

### Independent cooling performance graph shows:

Real life performance of how the system performs, reducing the temperature within the dwelling using the KERS Coolboost module and MVHR combined solution.



PATENT PENDING 2301647.0




Figure 1. Control strategy test results

Please note this is Peek Lopping and not air conditioning

# SCHEMATIC OVERVIEW


Showing varying operational modes of the Coolboost System.

## MODE 1

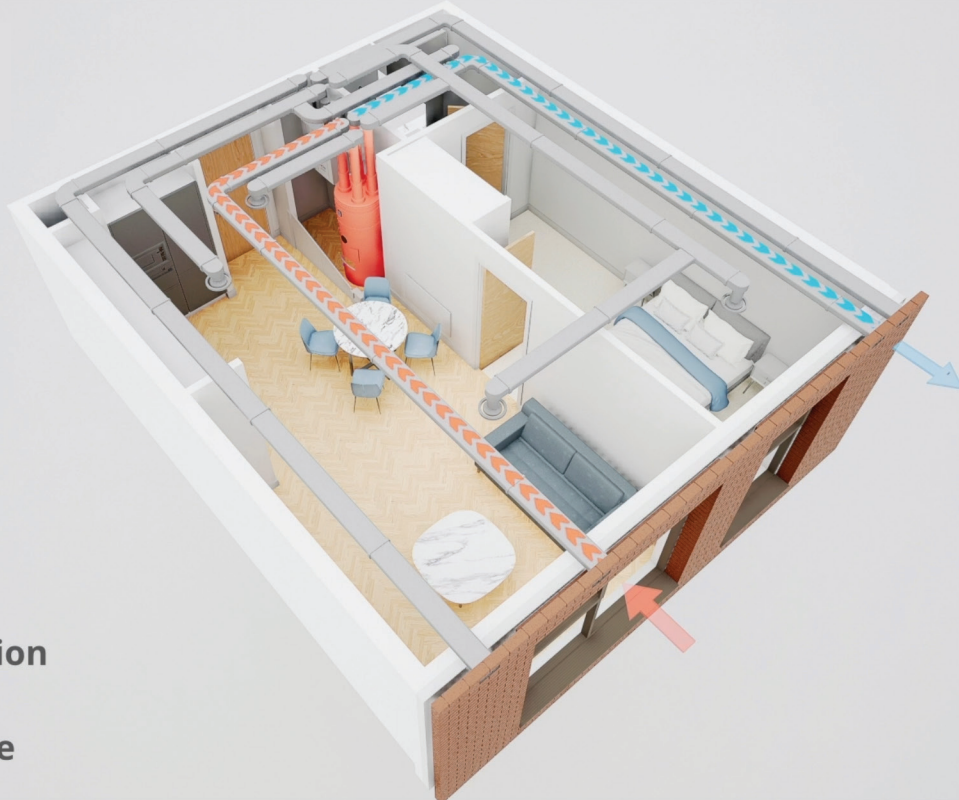

Normal Operation  
Heat Pump  
Hot Water Mode

## MODE 2

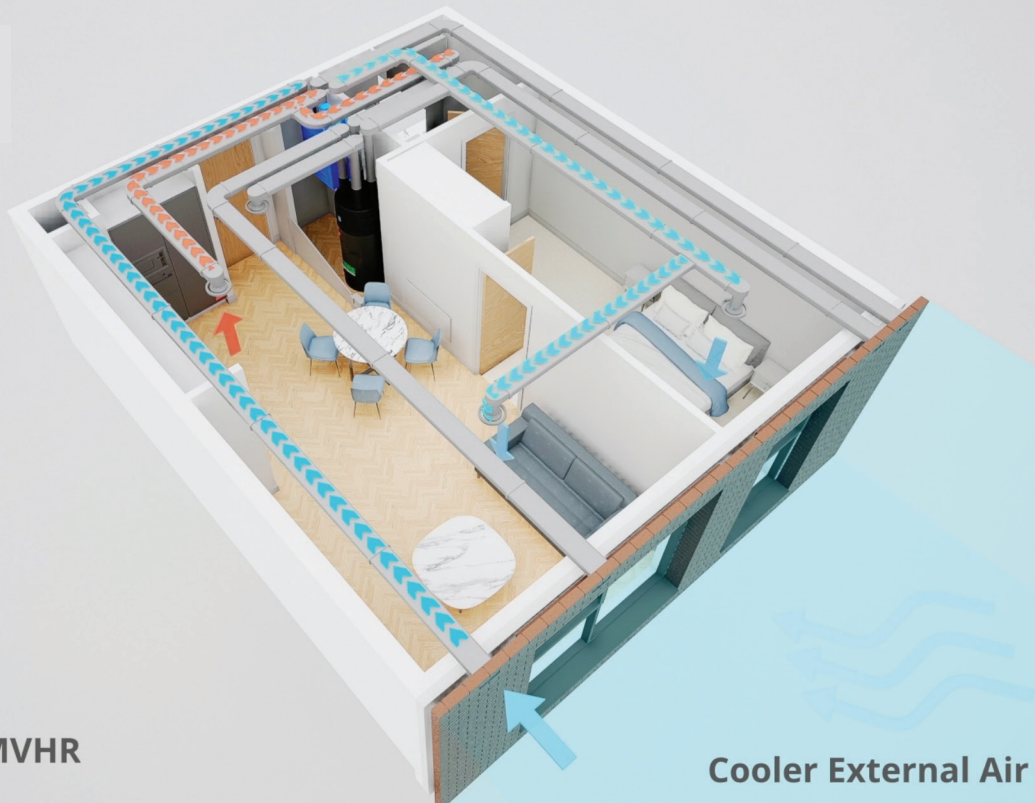

Summer  
Bypass Mode  
Controlled by MVHR

Cooler External Air

The KERS cooling system can work in conjunction with MVHR Systems. Both systems work independently when no cooling is required.

Once the temperature within the apartment exceeds 26 Degrees, the MVHR System will first use the cooler external air to reduce the internal temperature. If the external temperature is equal or higher than the internal temperature, the MVHR System then sends a signal to the Coolboost Module to activate the cooling controls, therefore producing cooling to the apartments via the MVHR ducting.

## MODE 3



Coolboost  
Heat Pump On  
Cooling Mode



# KERS INDOOR COOLBOOST MODULE HEAT PUMP



## SPECIFICATIONS

\* 5 YEAR WARRANTY SUBJECT TO ANNUAL SERVICE AGREEMENT \*

Model	W230	W300
Below calculations based on 55°C according to EN16147		
Tank Volume (Litres)	230	300
Cooling Capacity	1.5kw	1.5kw
Heating Capacity (W)	2010	2010
Max Power Input	560w	560w
COP (EN255/3)	4,5	4,5
COP (EN16147)	3,5	3,5
Electrical Connection	230v/50Hz/1Ph	230v/50Hz/1Ph
AMP	10	10
Working Pressure	8 BAR	8 BAR
Max Water Temp (No immersion)	70c	70c
Refrigerant	R134A	R134A
Electrical Heater Optional (W)	3000	3000
Duct Minimum Diameter (mm)	150mm/220mm x 90mm	150mm/220mm x 90mm
Max Pressure (Pa)	see fan spec	see fan spec
Flow rate minimum (l/s)	80	80
Corrosion Protection	Vacuum enameled	Vacuum enameled
Weight (Kg)	105	120
Dimensions (mm) HxD	1858 x 668	2108 x 668



Kers Innovations UK Ltd  
Unit 1 Unit 1a  
Spring Street Industrial Park  
St Marks Street, Bolton, BL3 6NR

Telephone: 01204 963630  
Telephone: 0333 444 0815  
Email: info@kers.co.uk

[KERS.CO.UK](http://KERS.CO.UK)